



EL-3SP-8W-5CCT; EL-3SP-8W-5CCTBL
3" LEDSLIM PANEL 8W 5CCT (White / Black)

Eliteline



Anti-Light Leakage

Integrated structure and avoid light leakage

LED Driver

Green aluminum box with wire connector



Dimming

5%–100% dimmable
 TRIAC/ELV dimmers

Ultra-slim Appearance

Without big can, low-profile recessed fixture, fit in the tightest of spaces

Suitable for new construction and remodel installation

Easy Installation

Flat and smooth surface makes installation easier

Two spring clips can be attached to any ceiling material



INSTRUCTION

EL-3SP-8W-5CCT; EL-3SP-8W-5CCTBL

3 inches recessed round LED panel light in 3000K/3500K/4000K/5000K/6000K
 Panneau lumineux rond encastré DEL de 3po. 3000K/3500K/4000K/5000K/6000K

There is dip switch on the front of junction box, and regularly marks 3000K/3500K/4000K/5000K/6000K. The dip switch also called CCT selectable.

Select certain color temperature (3000K/3500K/4000K/5000K/6000K) on dip switch, then the light will be that color. Wall switch only has ON/OFF function under this situation.




See reverse side for more instructions
 Voir au verso pour plus d'instructions



SPECIFICATIONS

Product	EL-3SP-8W-5CCT and EL-3SP-8W-5CCTBL
Type	3"
Power	8W
Voltage - Frequency	120VAC 60Hz
Color Temp. (ANSI)	3000K/3500K/4000K/5000K/6000K
CRI (Ra)	80
Typical lumens (lm)	550
Efficacy (LPW)	69
Beam Angle	120°
Dimmable	Yes
Power Factor	0.9
Operating Temperature	-20℥- 40℥(-4℥~104℥)
Dia. x MOL	90 x 24 MM
Driver Dimensions (LxWxH)	105 x 32.4 MM
Ceiling Opening Dia.	3"

PRODUCT STRUCTURE

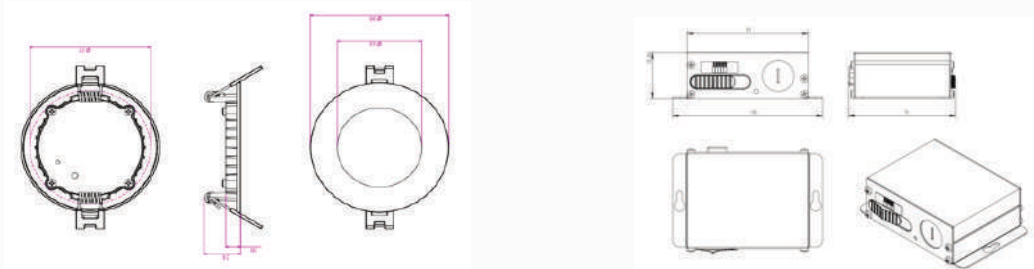


NEW CONSTRUCTION OR RE-MODEL INSTALLATION


① Tools to open the appropriate holes in the ceiling.




② Connect the AC power.




1. Open the box.
2. Take out accessory of wire clip.




Use suitable tool to remove one of the knockouts of the side plate.



1. Remove one of the knockouts on the side plate.
2. Put wires through the hole.



③ Holding the clips, and push the fixture into installation hole.



④ Release spring clips and push into place.

