



EL-4SP-10W-3KFR / 4KFR / 5KFR / 6KFR 4" Slim Panel with Fire Rated Driver

Eliteline



EL-4SP-10W-3KFR- Single Colour 3000K

EL-4SP-10W-4KFR- Single Colour 4000K

EL-4SP-10W-5KFR- Single Colour 5000K

EL-4SP-10W-6KFR- Single Colour 6000K

4" 10W Slim Panel with Fire Rated Driver
1000 Lumens

Features

Body

Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare

LED Characteristics

This general application light fixture features a 10 watt LED module that maintains uniform intensity producing up to 1000 lumens; with a typical CRI of 80+. Available in 3000K, 4000K, 5000K, and 6000K

Dimming

10%-100% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

Mounting

Includes two spring loaded clips to attached to any ceiling material. The slim profile allows to be mounted under joists or duct work.

Beam angle

100°

LED Driver

Extruded junction box with 220mA dimmable class II electronic LED driver with 100-130V 60Hz input. Includes an 18AWAG cable from driver to fixture.

Quick Connect push-in terminals

Three "Quick connect" push-in terminals for fast and easy wiring.

Operating Temperature

-20°C~40°C(-4°F~104°F)

Environment

Suitable for damp locations.
Suitable for insulated ceiling applications.

Certificate

This LED recessed light is IC rated, ETLES certified and wire terminal is UL-certified. It is permitted to be in contact with insulations in ceilings, meaning the junction box is thermally protected.


Instruction

EL-4SP-10W-3KFR, EL-4SP-10W-4KFR, EL-4SP-10W-5KFR, EL-4SP-10W-6KFR

4 Inch Recessed Round LED Panel Lighting with Fire Rated Driver

Panneau lumineux rond encastré DEL de 4po avec boîte coupe-feu.

The slim panel is single colour. Available in 3000K, 4000K, 5000K, and 6000K.

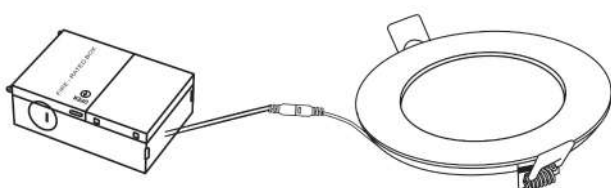

Description

This ultra thin recess light is a 10 watt 4" slim profile light fixture for recess retrofit application. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design, Suitable for damp locations.



See reverse side for more instructions
Voir au verso pour plus d'instructions

Eliteline



Product	EL-4SP-10W-3KFR	EL-4SP-10W-4KFR	EL-4SP-10W-5KFR	EL-4SP-10W-6KFR
Type	4"	4"	4"	4"
Power	10W	10W	10W	10W
Voltage - Frequency	120VAC 60Hz	120VAC 60Hz	120VAC 60Hz	120VAC 60Hz
Color Temp. (ANSI)	3000K	4000K	5000K	6000K
CRI (Ra)	>80	>80	>80	>80
Typical lumens (lm)	1000	1000	1000	1000
Efficacy (LPW)	100	100	100	100
Beam Angle	100°	100°	100°	100°
Dimmable	Yes	Yes	Yes	Yes
Power Factor	0.9	0.9	0.9	0.9
Operating Temperature	-20°C to 40°C(-4°F to 104°F) -20°C to 40°C(-4°F to 104°F) -20°C to 40°C(-4°F to 104°F) -20°C to 40°C(-4°F to 104°F)			

LED Driver

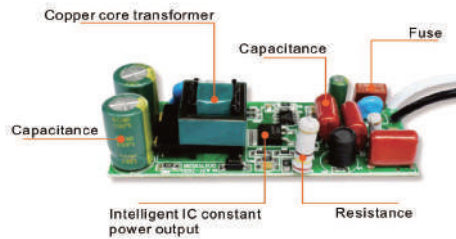


Intelligent IC constant power output


Installation




Use tools to open the appropriate holes in the ceiling.





Open the box
Take out accessory of wire clip.




Use suitable tool to remove one of the knockouts of the side plate.



Remove one of the knockouts on the side plate.
Put wires through the hole.

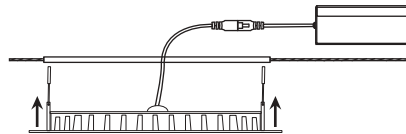

Holding the clips, and push the fixture into installation hole.

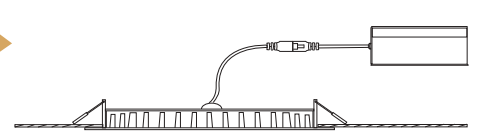

Release spring clips and push into place.

See reverse side for more instructions
Voir au verso pour plus d'instructions

Eliteline

