




1 Lighting Parameters

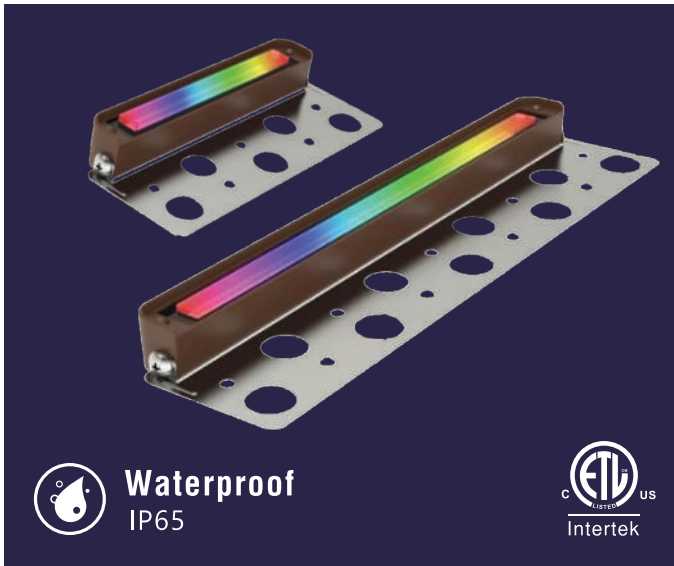


Product Name:	7" RGBCCT Hardscape Light	12" RGBCCT Hardscape Light
Model:	EL-HS7-RGBCCT	EL-HS12-RGBCCT
Power:	4.5W	7W
Voltage:	AC / DC 12V-24V	AC / DC 12V-24V
Product Size:	7"	12"
CRI:	>80	>80
CCT:	RGB + 3000K-6500K	RGB + 3000K-6500K
Beam Angle:	95°	95°
Lumens:	310 Lumens	450 Lumens
Efficacy:	78 lm	65 lm
IP Rating:	IP 65 Waterproof	IP 65 Waterproof
Material:	Aluminium + Stainless Steel	Aluminium + Stainless Steel
Lifespan:	40,000 hours	40,000 hours
Working Temp:	-4°F - 104°F	-4°F - 104°F

2 Features

- 1) 2.4G RF Remote controller, freely controlled with a range of 20-30 meters.
- 2) RGB+CCT: 3000K-6500K colour temperature adjustable
- 3) Brightness 1%-100% smooth dimmable by remote controller
- 4) Colour Changing Sequence: red, green, blue, purple, yellow, cyan, warm white, cool white
- 5) Memory function available.
- 6) Swivel Design: can be rotated 270° up and down that fits more applications.
- 7) Premium Aluminium and stainless steel material, waterproof IP65 perfect for wet outdoor locations.
- 8) Two way installation available, easy to install. All the needed accessories are included.
- 9) ETL certified, safe to use.


3 Dimensions

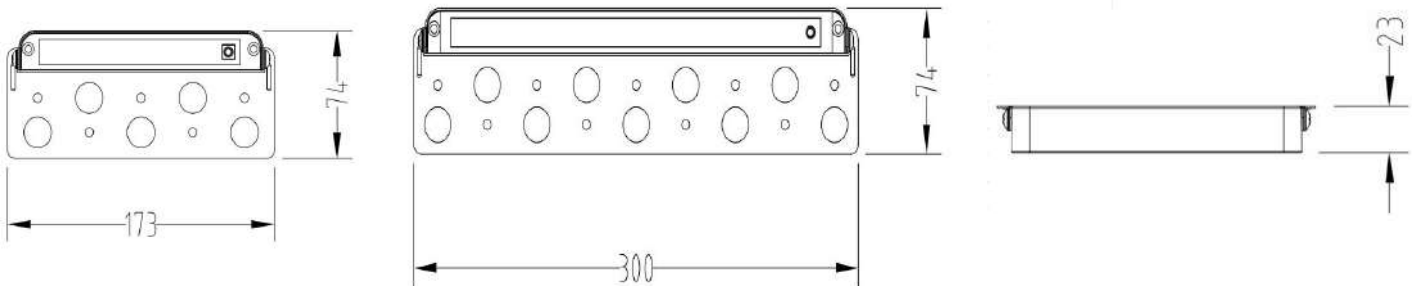

EL-HS7-RGBCCT


EL-HS12-RGBCCT

4 Colour Changing

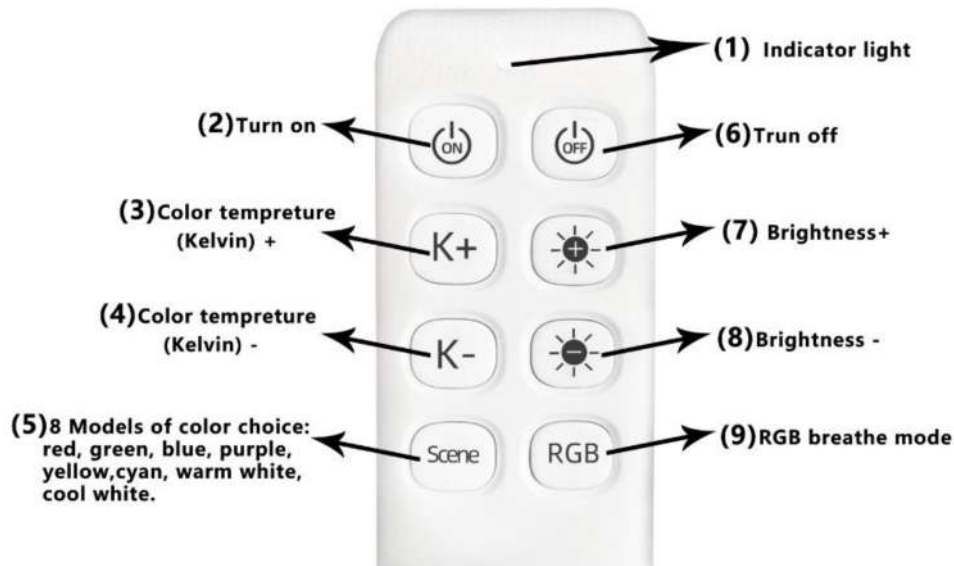


5 Installation

Figure 1

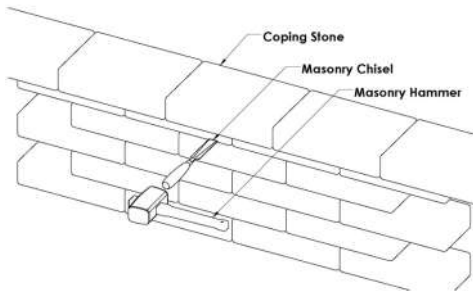


Make sure the main power supply is turned off. Use a masonry hammer and chisel to remove the coping stone above the point of application

Figure 2

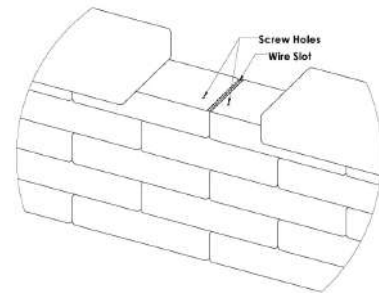


Use an angle grinder with a diamond-tipped blade to cut a groove along the wire marking. Make sure the groove is deep enough for the wire to rest flush with the stone the slab is on

Figure 3

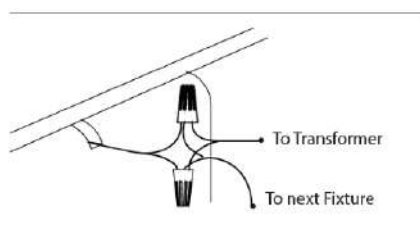

Connect the fixture wires to landscape wires connected to your transformer using the provided outdoor rated wire nuts

Figure 4

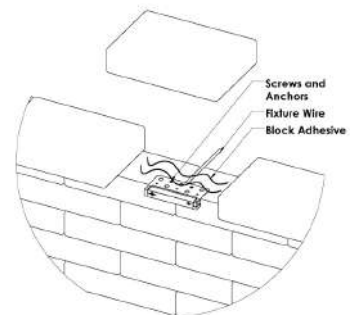

Replace the coping stone on top of the fixture, using block adhesive to secure it in place

