



EL-4SP-10W-5CCTSWFR

4" Slim Panel with Fire Rated Driver (CCT on Wall Switch)

Eliteline



4" SLIM PANEL – 5CCT, 10W, 1000LM
3000K/3500K/4000K/5000K/6000K/SW
SW Mode – Colour Changing on Wall Switch

Features

Body

Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare

LED Characteristics

This general application light fixture features a 10 watt LED module that maintains uniform intensity producing up to 1000 lumens; with a typical CRI of 80+. Available in 5CCT (3000K, 3500K, 4000K, 5000K, 6000K)

Dimming

10%-100% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

Mounting

Includes two spring loaded clips to attached to any ceiling material. The slim profile allows to be mounted under joists or duct work.

Beam Angle

100°

LED Driver

Extruded junction box with 220mA dimmable class II electronic LED driver with 100-130V 60Hz input. Includes an 18AWAG cable from driver to fixture.

Quick Connect

Three "Quick connect" push-in terminals for fast and easy wiring.

Operating Temperature


-20°C~40°C (-4°F~104°F)

Environment

Suitable for damp locations.
Suitable for insulated ceiling applications.

Certificate

This LED recessed light is IC rated, ETL certified and wire terminal is UL-certified. It is permitted to be in contact with insulations in ceilings, meaning the junction box is thermally protected.





CCT Adjustable by DIP Switch

Locate the DIP switch on the driver, and move the switch to the required colour temperature setting (3000K, 3500K, 4000K, 5000K, 6000K)

Adjustable by Wall Switch

Place the DIP switch on SW Mode. Continue toggling the wall switch every 1-2 seconds until you reach the desired colour temperature. The fixture will cycle through the available settings with each toggle. Leave the light on for a few seconds to set colour setting.

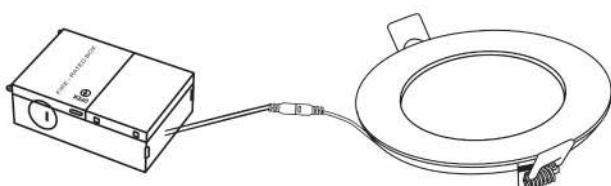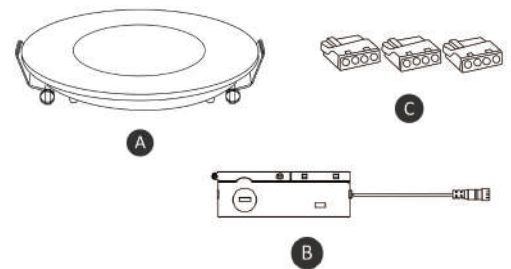

Description

This ultra thin recess light is a 10 watt 4" slim profile light fixture for recess retrofit application. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design. Suitable for damp locations.



See reverse side for more instructions
Voir au verso pour plus d'instructions

Eliteline



| Product | | EL-4SP-10W-5CCTSWFR |
|-----------------------|----------------------------------|---------------------|
| Type | 4" | |
| Power | 10W | |
| Voltage - Frequency | 120VAC 60HZ | |
| Color Temp. (ANSI) | 3000K/3500K/4000K/5000K/6000K/SW | |
| CRI (Ra) | > 80 | |
| Typical lumens (lm) | 1000 | |
| Efficacy (LPW) | 100LM/watt | |
| Beam Angle | 100° | |
| Dimmable | Yes | |
| Power Factor | 0.9 | |
| Operating Temperature | -20°C to 40°C (-4°F to 104°F) | |

LED Driver

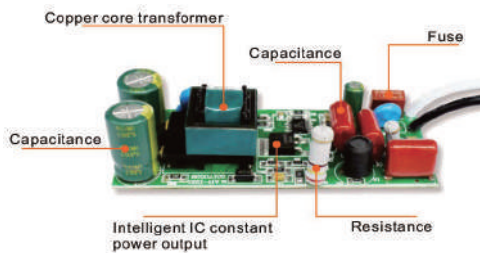


Intelligent IC constant power output


Installation




Use tools to open the appropriate holes in the ceiling.





Open the box
Take out accessory of wire clip.




Use suitable tool to remove one of the knockouts of the side plate.



Remove one of the knockouts on the side plate.
Put wires through the hole.

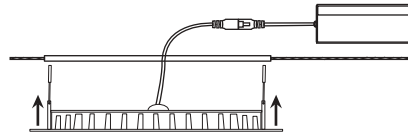

Holding the clips, and push the fixture into installation hole.



Release spring clips and push into place.

See reverse side for more instructions
Voir au verso pour plus d'instructions

