



EL-EB3-8W-5CCTNL

3" Eyeball Gimbal with Night Light & Fire Rated Driver

Eliteline



3" EYEBALL GIMAL - 5CCT, 8W, 850LM

5CCT (3000K/3500K/4000K/5000K/6000K)
2200K Night Light - Mode Change on Wall Switch

SUITABLE FOR WET LOCATION

AVAILABLE IN WHITE TRIM

Features

Body

Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare

LED Characteristics

This general application light fixture features a 8 watt LED module that maintains uniform intensity producing up to 850 lumens; with a typical CRI of 80+. Available in 5CCT (3000K, 3500K, 4000K, 5000K, 6000K) with 2200K Night Light.

Dimming

10%-100% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

Mounting

Includes two spring loaded clips to attached to any ceiling material. The slim profile allows to be mounted under joists or duct work.

Beam Angle

36°

LED Driver

Extruded junction box with 220mA dimmable class II electronic LED driver with 100-130V 60Hz input. Includes an 18AWAG cable from driver to fixture.

Quick Connect

Three "Quick connect" push-in terminals for fast and easy wiring.

Operating Temperature

-20°C~40°C (-4°F~104°F)

Environment

Suitable for wet locations.
Suitable for insulated ceiling applications.

Certificate

This LED recessed light is IC rated, ETL EScertified and wire terminal is UL-certified. It is permitted to be in contact with insulations in ceilings, meaning the junction box is thermally protected.



EL-EB3-8W-5CCTNL

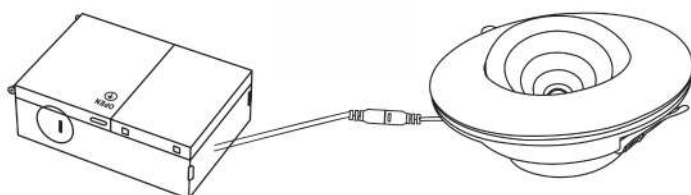
3" Eyeball Gimbal with Fire Rated Driver - White and Black Trim
5CCT (3000K, 3500K, 4000K, 5000K, 6000K) + 2200K Night Light

CCT Adjustable by DIP Switch

Locate the DIP switch on the driver, and move the switch to the required colour temperature setting (3000K, 3500K, 4000K, 5000K, 6000K)

Night Light Mode on Wall Switch

Use the wall switch to change between regular light and night light mode. Switch OFF-ON wall switch to change to night light mode.



Description

This gimbal recess light is a 8 watt 3" light fixture for recess retrofit application. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design. Suitable for wet locations.


See reverse side for more instructions
Voir au verso pour plus d'instructions







Eliteline



Product		EL-EB3-8W-5CCTNL
Type		3"
Power		8W
Voltage - Frequency		120VAC 60HZ
Color Temp. (ANSI)		3000K / 3500K / 4000K / 5000K / 6000K + 2200K Night Light
CRI (Ra)		>80
Typical lumens (lm)		850
Efficacy (LPW)		106 LM/watt
Beam Angle		36°
Dimmable		Yes
Power Factor		0.9
Operating Temperature		-20°C to 40°C (-4°F to 104°F)

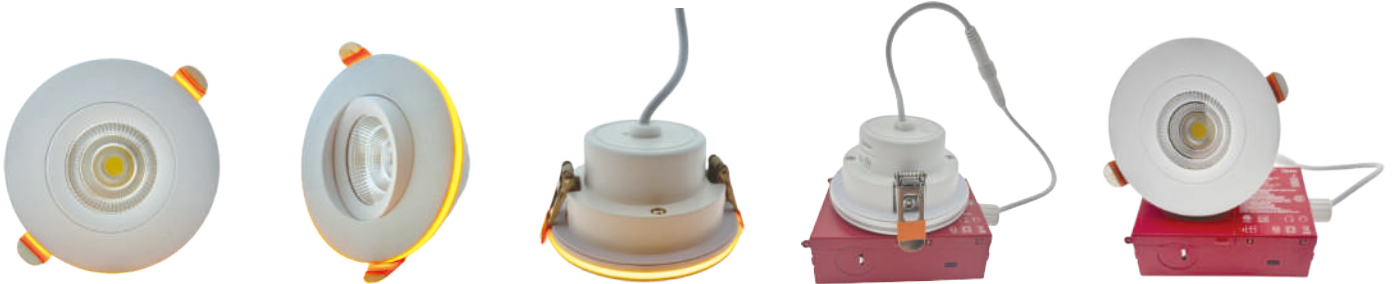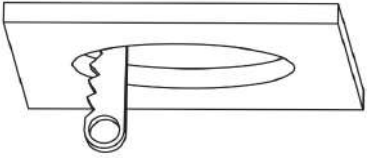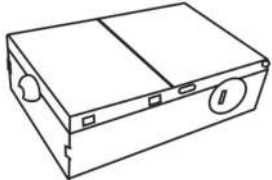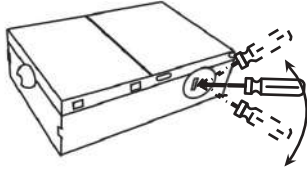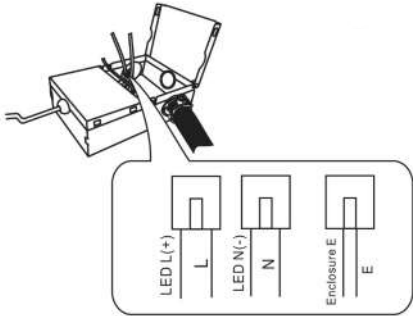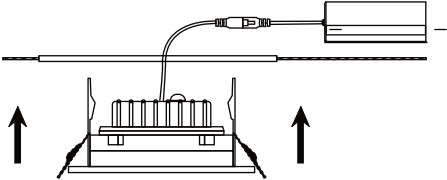Images



<p>1</p>  <p>Find the template (for the hole size installation) in the back of the box. Use the circle template to measure the size of hole. Then cut out hole.</p>	<p>2</p>  <p>Open the box. Take out accessory of wire clip.</p>
<p>3</p>  <p>Use tool to remove one of the knockouts of the side plate.</p>	<p>4</p>  <p>Remove one of the knockouts on the side plate. Put wires through the hole.</p>
<p>5</p> 	<p>6</p>  <p>Holding the clips, and push the fixture into installation hole. Release spring clips and push into place.</p>