



Linear High Bay: EL-HIGHBAY-120/277-3CCT3W

3500K/4000K/5000K | 100W/130W/160W

Eliteline



ELITELINE LINEAR HIGH BAY

3CCT: 3500K / 4000K / 5000K
3 Wattage: 100W / 130W / 160W

FEATURES:

- Most costeffective high bay with built in wattage & CCT selectable
- Rated for 50,000 hours @ 50°C
- UL, DLC Premium, FCC, RoHS rated
- Integrated with plug-and-play sensor port
- Die-Castingaluminum construction & UV stabilized polycarbonate lens
- 5-year warranty

PERFORMANCE:


- Wattage Selectable: 100W/130W/160W,
- Input Voltage: AC120-277(V)
- Delivered Lumens: 15000-60000(lm)
- Efficacy: 150(lm/w) @ 4000K
- CCT Selectable: 3500K/4000K/5000K
- Working Temperature : -20°C to 50°C
- Surge Protection: L-N:6KV, L/N-PE:6KV

MARKETS:

- Commercial & Big box retailers
- Gymnasiums
- Factories, warehouses

MOUNTINGS:

- Suspended chain
- Stem mounting
- Surface mounting

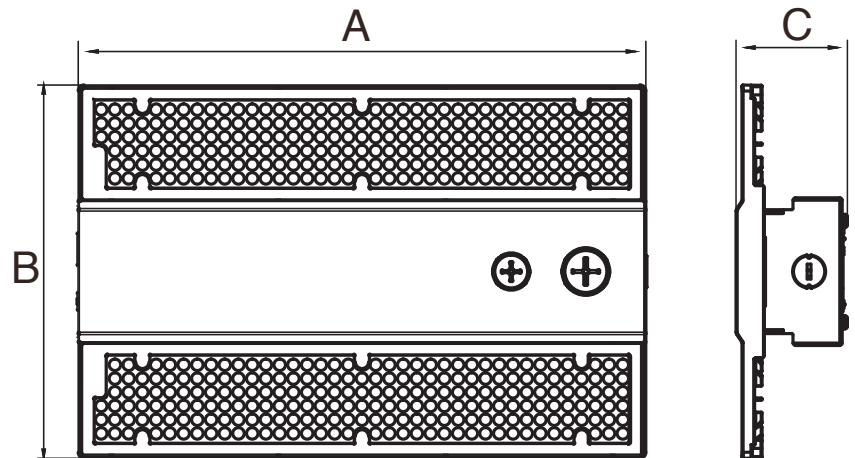

A = 15" B = 9.8" C = 2.9"

INSTALLATION:

1. Please turn off the power before operation.
2. LED lamp is extremely bright. To avoid possible damage to the eyes, do not stare into LED beam.
3. Please check the working voltage of product from the product label, do not exceed the working voltage range.
4. Input product line: brown or black is **L**, blue or white is **N**, yellow-green or green is **GND**.
5. Be sure wiring is closed and prevent leakage, when installing.
6. Please install and use the product under local fire regulations.