




# 12" & 15" FLUSH MOUNT CEILING LIGHT

Eliteline

## 1 Lighting Parameters




Product Name:	12" Flush Mount Ceiling Light	15" Flush Mount Ceiling Light
Model:	EL-12FM-5CCT	EL-15FM-5CCT
Power:	15W	25W
Voltage:	120V	120V
Product Size:	12"	15"
CRI:	>80	>80
CCT:	30K/35K/40K/50K/60K	30K/35K/40K/50K/60K
Beam Angle:	120°	120°
Lumens:	1200 Lumens	2200 Lumens
Efficacy:	80 lm	88 lm
Lifespan:	40,000 hours	40,000 hours
Working Temp:	-4°F - 104°F	-4°F - 104°F




## 2 Features

- 1) Modern design and stylish look with efficient lighting.
- 2) Smooth dimming 10% – 100% with 5CCT colour adjustable (30000K/3500K/4000K/5000K/6000K)
- 3) The fixture is suitable for a wide variety of applications including family room, bedroom, hallway, corridor, or any other common areas in your living space
- 4) Energy saving and efficient lighting that can replace incandescent fixtures and save up to 8x as much on your energy costs.
- 5) Durable fixture with a lifespan of 40,000 hours, designed to be long lasting with normal operation.
- 6) ETL certified, safe to use.


## 3 Dimensions

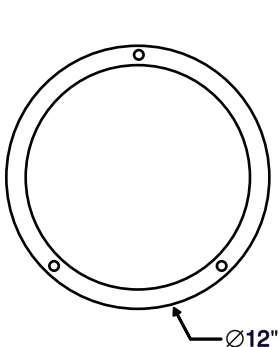

EL-12FM-5CCT

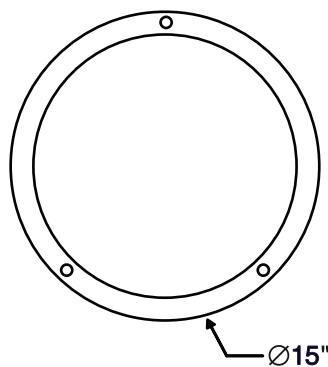

EL-15FM-5CCT




See reverse side for more information  
Voir au verso pour plus d'information




## 4 Installation

Figure 1

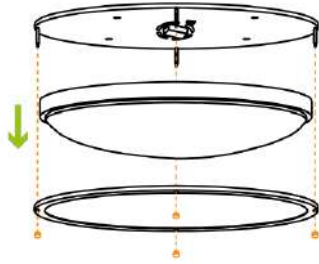


Unscrew cap nuts counter-clockwise and remove the metal ring and the lens.

Figure 2

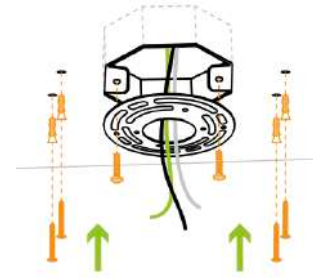


Attach the mounting plate to the outlet box using two screws. Drill four appropriate sized holes for anchors, insert anchors into the holes, twist the four self-tapping screws into the anchors.

Figure 3

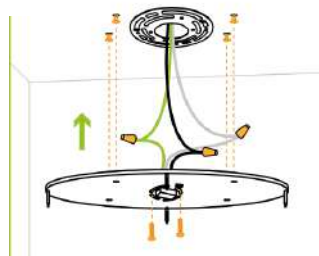

Connect the wires: Black to Black, White to White, Ground to Ground. Attach the back plate to the ceiling. Secure the fixture to the mounting plate using two screws.

Figure 4

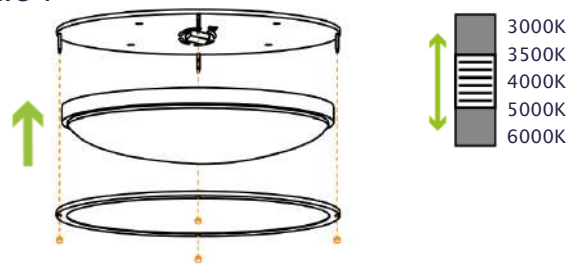

Choose either 3000K/3500K/4000K/5000K/6000K with a simple switch on the side of the fixture. Secure the lens and metal ring to the fixture pan using cap nuts.

