



4" 3CCT LED EYEBALL GIMBAL DOWNLIGHT 12W

Eliteline



Item Name: EL-EB4-12W-3CCT

4" 12W Air tight,
Gimbal 360 Degree Rotatable,
COB downlight

SPECIFICATION	
Application	Ceiling Recess Mount
Approved Location	Damp
Beam Angle	24°
CCT	3000K/4000K/5000K
Certification	ETL
Class Rate	Class II
Colour	White
CRI	≥ 80
Dimming	SCR (Silicon Controlled Rectifier) dimming
Energy Star	Yes
Hole Cut	∅ 106
Input	120V 60Hz
output	300mA 36V
Lumens	900LM
Lumens per Watt	75LM/W
Power Factor	0.95
Projected Life	50,000 hrs
Wattage	12W
Light Source	High Quality 12W COB LED

Features

Body
Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare

LED Characteristics
This general application light fixture features a 12 watt LED module that maintains uniform intensity producing up to 900 lumens.

Dimming
100%-10% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers.

Mounting
Includes two spring loaded clips to attached to any ceiling material. The slim profile allows to be mounted under joists or duct work.

Environment
• Suitable for damp locations.
• Suitable for insulated ceiling applications.


LED Driver
Extruded aluminum hardwire box with 210mA dimmable class II electronic LED driver with 100-120VAC input.

Quick Connect push-terminals
Three "Quick connect" push-terminals for fast and easy wiring.

Operating Temperature
-20°C~40°C (-4°F~104°F)

Lifespan
50,000 hours at 70% light output

Certificate
• cETL usETL
• Energy Star


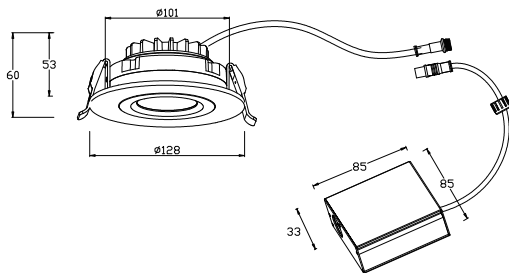




Description

The EL-EB4-12W-3CCT gimbal recessed downlight is a 12 watt 4" light fixture for recess retrofit application. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design. Suitable for damp locations.




Photometry

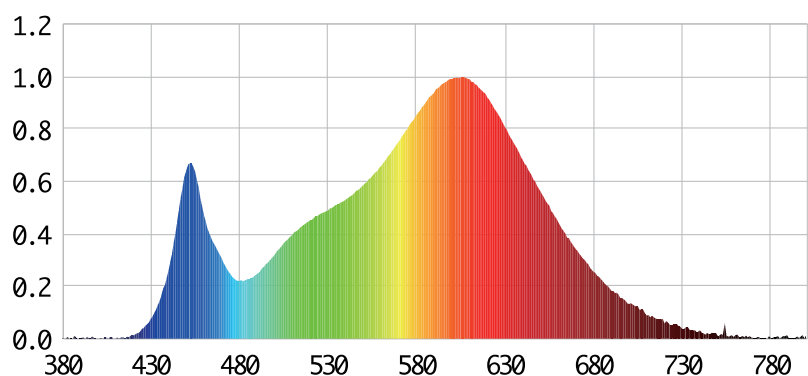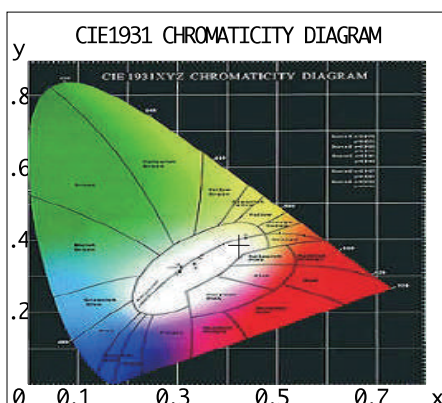

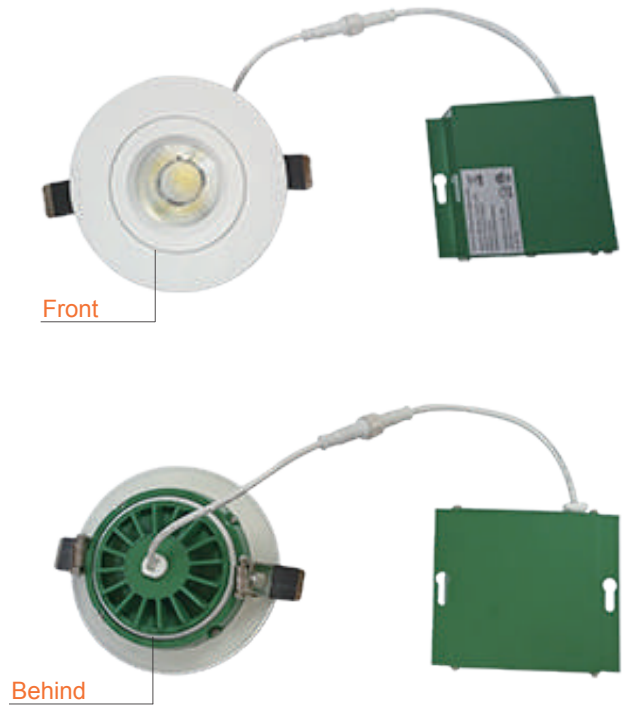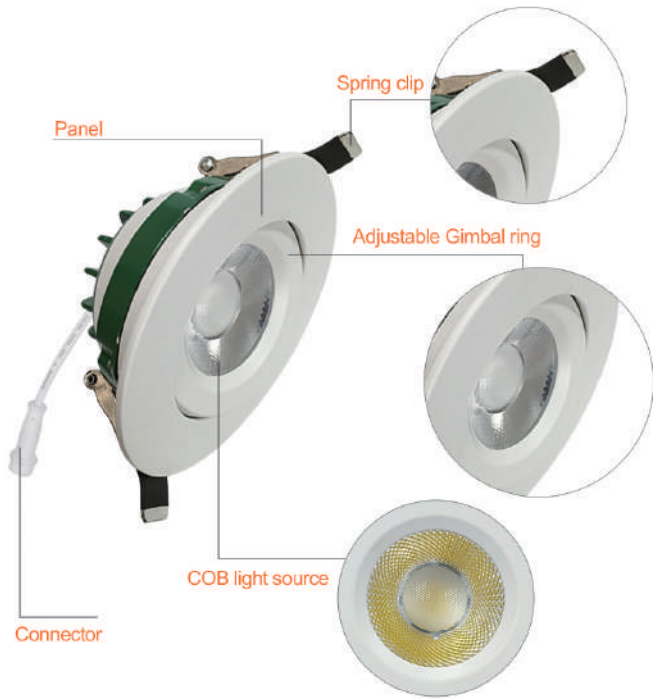

Aluminium Junction Box

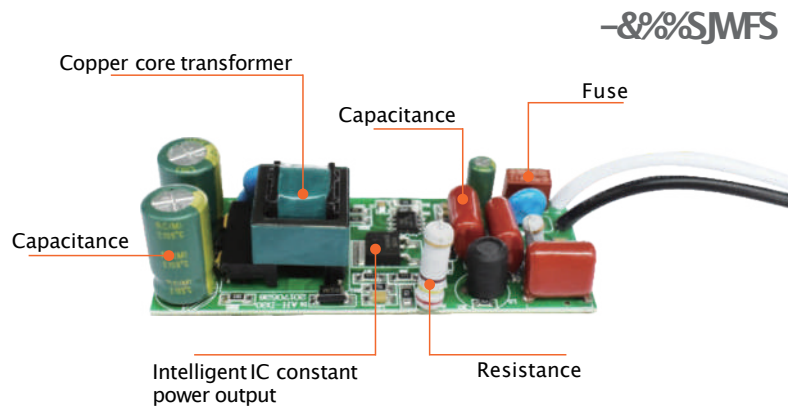

#&-08*5&.4'03015*0/'-

ItemNo.	Luminous	Light Source	CCT	Input Voltage	Wattage	CRI	Finish	Cuthole Size ϕ mm	Diameter Size ϕ mm	Dimmable	LEDChip Brand
EL-EB4-12W-3CCT	75LM/W	COB	3000K/4000K/5000K	AC 110-120V	12W	≥ 80	White	106	128	Yes	SANAN

Installation



Specifications Guide

Your Product Code

Series	Mounting For-box	Input Voltage	Color Temperature	Dimmable	Finish
<input type="checkbox"/> Ultra Slim Panel <input type="checkbox"/> LED Panel light <input checked="" type="checkbox"/> LED Gimbal Downlight <input type="checkbox"/> MountingPlate For Panels	<input type="checkbox"/> Galvanized <input type="checkbox"/> Metal <input checked="" type="checkbox"/> Aluminum	<input checked="" type="checkbox"/> 110V <input type="checkbox"/> 277V	<input type="checkbox"/> 2700K <input checked="" type="checkbox"/> 3000K <input checked="" type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K	<input type="checkbox"/> Non-Dimmable <input checked="" type="checkbox"/> Dimmable	<input checked="" type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Satin Nickel <input type="checkbox"/> Chrome



4" 3CCT LED EYEBALL GIMBAL DOWNLIGHT 12W

Eliteline