



# 5 " LED PIR SENSOR DISK LIGHT

Eliteline

## 01 Lighting Parameters



ProductName	Residential Disk Downlight
Model:	EL-MSFP-5-3CCT
Driver:	AdjustableCCT+ PIR sensor
Power:	8W
Voltage:	120V 50/60HZ
ProductSize:	d <sub>p</sub> 126.7mm
CRI <sub>g</sub>	Ra>90
CC T:	3000K/4000K/5000K
Source:	2835 0.5W
Beam Angle:	110°
Cover Type	Transparent PC
Color:	White
Lumen:	500 lm
Light Efficiency:	63lm/W


## 02 Features

- Using high-brightness LED chip, energy saving and environmental protection, stable lighting, long service life
- Optical grade lampshade, good light, anti-aging, not easy to damage
- Strict waterproof treatment technology, in line with international waterproof and dust-proof standards
- Radiation protection design, will not affect the lighting effect due to weather
- PIR Sensor
- 3CCT Adjustable colour temperature

## 03 CCT Instructions

### EL-MSFP-5-3CCT



- 5 inches PIR Sensor Flush Mount light in 3000K/4000K/5000K
- Panneau lumineux rond encastré DEL de 5po. 3000K/4000K/5000K



There is a dip switch on the flush mount light that marks 3000K/4000K/5000K. The dip switch is also called CCT selectable.

#### By dip switch

Select certain color temperature (3000K/4000K/ 5000K) on dip switch, then the light will be that color. Wall switch only has ON/OFF function under this situation.



**MOTION SENSOR**  
**DETECTEUR DE MOUVEMENTS**



**USES ONLY 8 WATTS**  
**UTILISE QUE 8 WATTS**



**RATED LIFE 50,000 HOURS**  
**DUREE DE VIE 50,000 HEURES**



**ULTRA THIN EDGE-LIT DESIGN**  
**ULTRA MINCE**



See reverse side for more information  
Voir au verso pour plus d'information







## 04 Colour



## 05 Dimensions

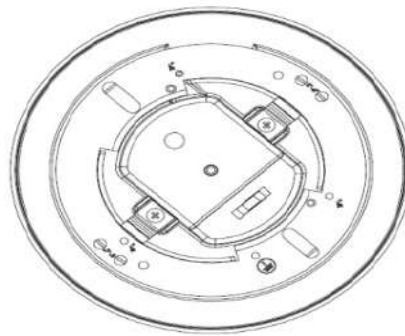

## 06 Installation



### Warning: Risk of electrical shock

Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply. Verify that supply voltage is within right and reasonable limits. Connect the fixture with 100-277V 50/60Hz power supply; Make all electrical and grounded connections in accordance with the National Electrical Code and applicable local code requirements

All wiring connections should be capped with UL approved wire connections.

### Warning: Risk of burn

Wear gloves and safety glasses at all times when moving luminaire from carton, installing, servicing or performing maintenance; Avoid direct eye exposure to the light source while it is on. LED lights are very bright. Do not stare LED light beam in any case. Or this may cause irreparable damage to the eyes.; Allow fixture to cool before handling. Do not touch enclosure or light source; Do not exceed maximum wattage marked on luminaire label.

### Warning: Beware of fire

Keep combustible and other materials that can burn away from lamp/lens.



EL-MSFP-5-3CCT

Eliteline